



## **Performance Air Intake Kit Part Number: 827-109**

**Honda 1992-1995 Civic  
1.5L / 1.6L / 1.8L / 2.0L**

## **Installation Instructions**

For technical inquiries please email us at [tech@hpsperformance.com](mailto:tech@hpsperformance.com)

In the email, please include the following information for faster response:

- Year / Make / Model / Engine of your vehicle
- If it is a fitment issue, please include pictures showing the fitment problem
- If there are missing parts, please list the part number(s) from the bill of materials on the 2nd page
- Optional but recommended – Your contact phone number and preferred call back time

You can also give us a call via 626-747-9200 for tech support Monday-Friday, 9:00am-5:00pm Pacific Time.

# Bill of Materials

## Kit Number : 827-109

Line #	Description	Part Number	Qty
1	Air Intake Pipe	529-99	1
2	Intake Bracket	530-100	1
3	HPS Air Filter	HPS-4276	1
4	Reducing Coupler, 2.50" - 3.00", 3.00" Long	P3SR-250-300-L3	1
5	Reducing Coupler, 2.75" - 3.00", 3.00" Long	P3SR-275-300-L3	1
6	T-Bolt Clamp, 70mm-78mm	SSTC-70-78	1
7	T-Bolt Clamp, 73mm-81mm	SSTC-73-81	1
8	T-Bolt Clamp, 79mm-87mm	SSTC-79-87	1
9	8mm EPDM Hose	EPDM-032	14 inches
10	6mm Bolt, 12mm Long	HW-B6-12	1
11	6mm Flange Nut	HW-N6	1
12	6mm Flat Washer, 16mm OD	HW-FW6L	2
13	6mm Rubber Vibration Mount, 1/2" Tall	HW-RM6-50	1

- **Before installing any parts of this intake kit, please read the instructions thoroughly.**
- **Verify the contents of this intake kit before disassembling your vehicle.**
- **Report any defective or missing parts to HPS directly. The HPS dealer you purchased this product from might not have the replacement parts you need.**
- **Installation requires moderate mechanical skills. A qualified mechanic is highly recommended.**
- **Do not attempt to install the intake kit while the engine is hot.**
- **This installation may require removal of coolant lines that may be hot.**
- **For technical inquiries, please email us at [tech@hpsperformance.com](mailto:tech@hpsperformance.com)**

## **PLEASE READ CAREFULLY BEFORE INSTALLATION!**


This installation is not for the novice customer. Install this product with EXTREME caution! Misuse of this product can destroy your engine! If you are not mechanically inclined, please have a professional automotive mechanic install this kit.

***NOTE: HPS holds no responsibility for any engine damage that results from misuse of this product.***

## **GETTING STARTED**

1. Turn the ignition OFF and disconnect the vehicle's negative battery cable. If the engine has run within the past two hours, let it cool down.

NOTE: Disconnecting the negative battery cable erases pre-programmed electronic memories. Write down all memory settings before disconnecting the negative battery cable. Some radios will require an anti-theft code to be entered after the battery is reconnected. The anti-theft code is typically supplied with your owner's manual. In the event your vehicle's anti-theft code cannot be recovered, contact an authorized dealership to obtain your vehicle's anti-theft code. We also highly recommend NOT discarding any stock parts after the installation.

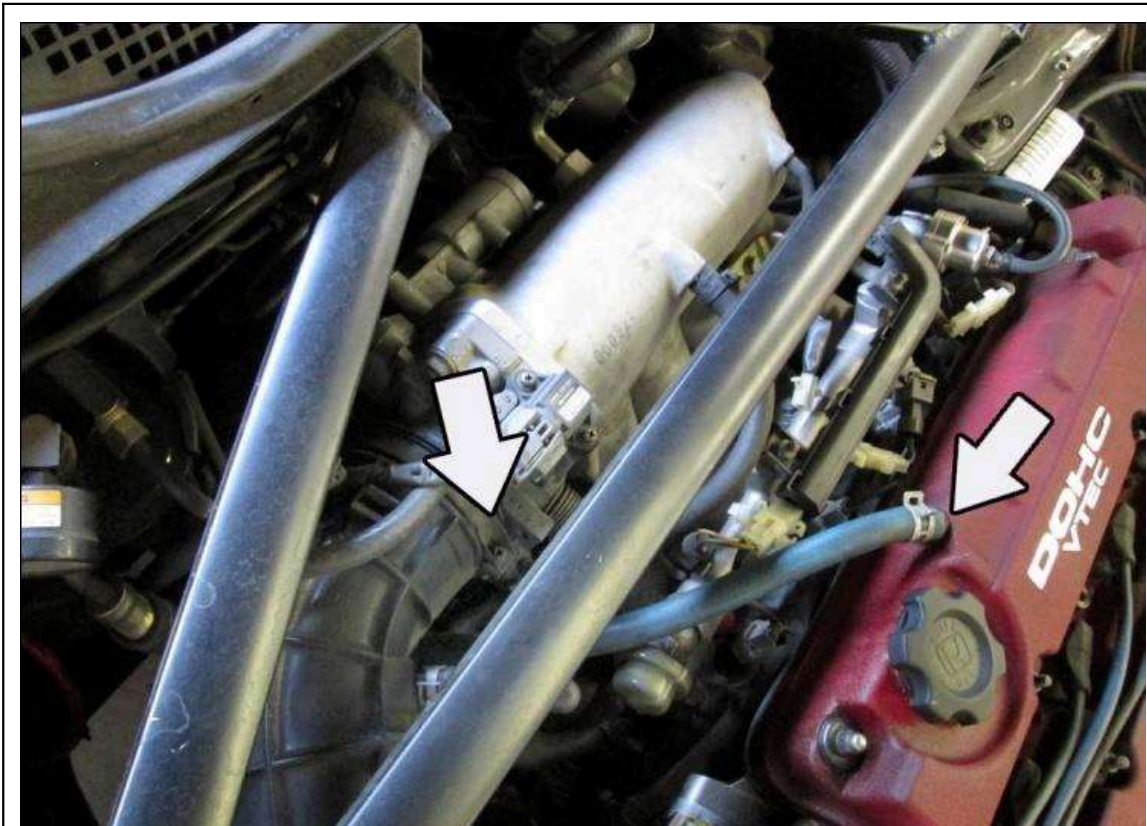


2. Loosen the clamp on the factory air intake hose at the throttle body and disconnect the breather hose from the valve cover.




3. Remove the three bolts securing the airbox to remove the airbox and air intake hose from the engine bay.



4. Slip the silicone coupler and T-bolt clamps onto the throttle body. Only secure the clamp on the throttle body end at this time.

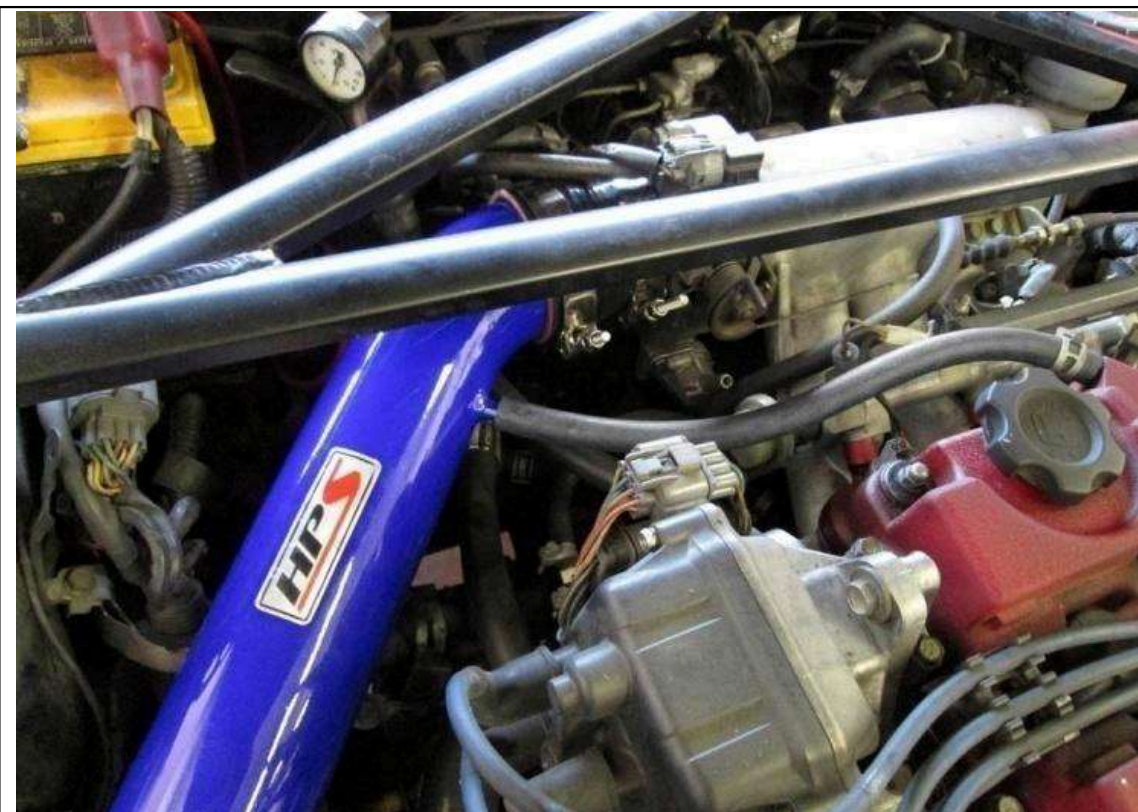

5. Slide the HPS intake pipe onto the coupler at the throttle body but do not tighten the second clamp at this time. Install the breather hose included in the kit by pushing one end onto the bung of the HPS intake. Reuse the factory clamp to secure the other end to the valve cover.

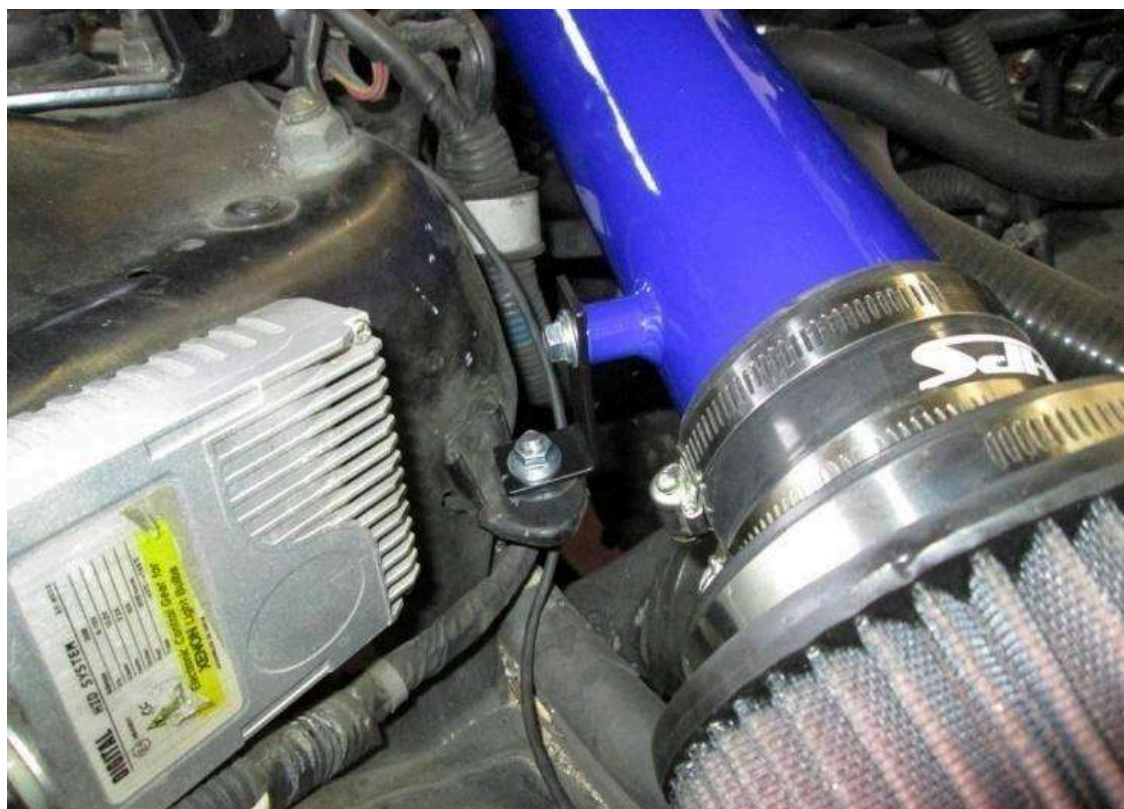

6. Install the rubber mount and intake bracket using the hardware included. Attach the HPS Air Filter to the end of the intake.

## **FINAL STEPS**

Once the intake has been positioned, tighten all of the clamps and secure all of the parts.

Upon completion of the installation, reconnect the negative battery terminal before you start the engine. Double check to make sure everything is tight and properly positioned before starting the vehicle.

Start the engine. Let the car idle for 3 minutes. Perform a final inspection before driving. Listen carefully for any odd noises, rattles and/or air leaks prior to taking it for a test drive. If any problems arise go back and check the vacuum lines, hoses and clamps that may be causing leaks or rattles and correct the problem.

Periodically, recheck the alignment of the intake kit and make sure there is proper clearance around and along the length of the intake. Failure to follow proper maintenance procedures may cause damage to the intake and will void the warranty.



**Also available for:**  
**Honda 1992-1995 Civic 1.5L / 1.6L / 1.8L / 2.0L**



**HPS Performance Replacement Air Filter**  
For Intake Kit 827-109  
Part Number [HPS-4276](#)



**HPS Performance Air Filter Cleaning Kit**  
Part Number [HPS-AFRC](#)



**HPS Silicone Radiator Hose Kit**  
For Civic 1.5L D15 D16 SOHC  
Part Number [57-1018](#)



**HPS Silicone Heater Hose Kit**  
For Civic 1.5L D15 SOHC  
Part Number [57-1775](#)



**HPS Silicone Radiator Hose Kit  
For Civic with B16  
Part Number [57-1019](#)**



**HPS Silicone Radiator Hose Kit  
For Civic with B18 B20  
Part Number [57-1003](#)**

Contact an authorized HPS Performance dealer or  
visit us at [hpsperformance.com](http://hpsperformance.com) for more details